


## TECHNICAL DATA SHEET

### DESCRIPTION

A110 Metal Rib is fabricated from 26 gauge hot-dipped galvanized steel.

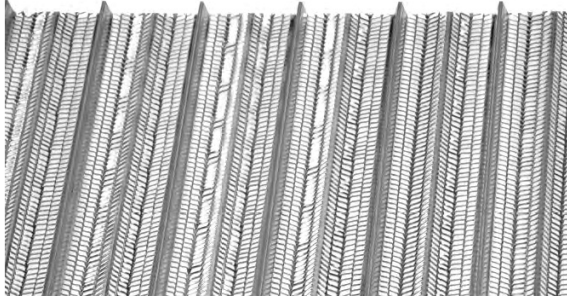


### MANUFACTURER

Dayton Superior Corporation  
 1125 Byers Road  
 Miamisburg, OH 45342  
 Customer Service: 888-977-9600  
 Technical Services: 877-266-7732  
 Website: www.daytonsuperior.com

### WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.

### DSC A110 Metal Rib Load Versus Deflection

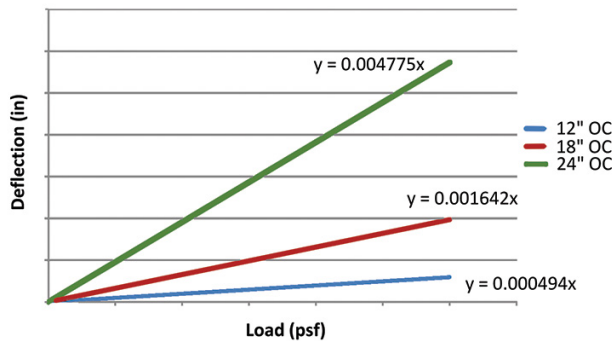

### FEATURES

- Lightweight sheets are easily cut and installed in the field.
- Formwork is left in place, so no stripping of forms required - simply remove brace.
- Can be used in applications ranging from pile caps and footings, to blind side walls and tunnels.
- Concrete pours in 3 to 4 foot lifts are preferable with this forming system.
- Meets requirements of ASTM A653 and ASTM C847.

### TECHNICAL DATA

Surfact/Sheet	18 sq. ft.
Pallet/Ordering	250 sheets/4500 sq. ft.
Rib Space	3.80"
Sheet Thickness	26 ga

### RELATED PRODUCTS

- A46 Ties
- B6R Rebar Hook
- A46B1 and A3B1 Combination Ties

### ORDERING INFORMATION

METAL RIB - N/A

Product Code	Description	Weight
139700	27" X 97" SHEET	11.90 LB